



Building and Safety Division
22795 Barton Road
Grand Terrace, CA 92313
Phone 909-824-6621, Ext. 250
Fax 909-824-6624



TYPICAL STAKE ANCHORAGE FOR TEMPORARY TENT STRUCTURES

(Not applicable to Bail ring tents, structures larger than 40' x 60', or heights greater than 20')

Structural Requirements:

- Spacing of anchorage guy rope must be no more than 10 ft. o.c.
- Guy rope must be at least 3/4" diameter wire rope cable.
- Side pole shall have (4) 1" diameter x 4 ft. long rods into the ground. See diagram A
- Guy rope stake must have a minimum of (2) 1" diameter x 4 ft. long rods. See diagram B

Galvanized steel
Side post & Base
Plate

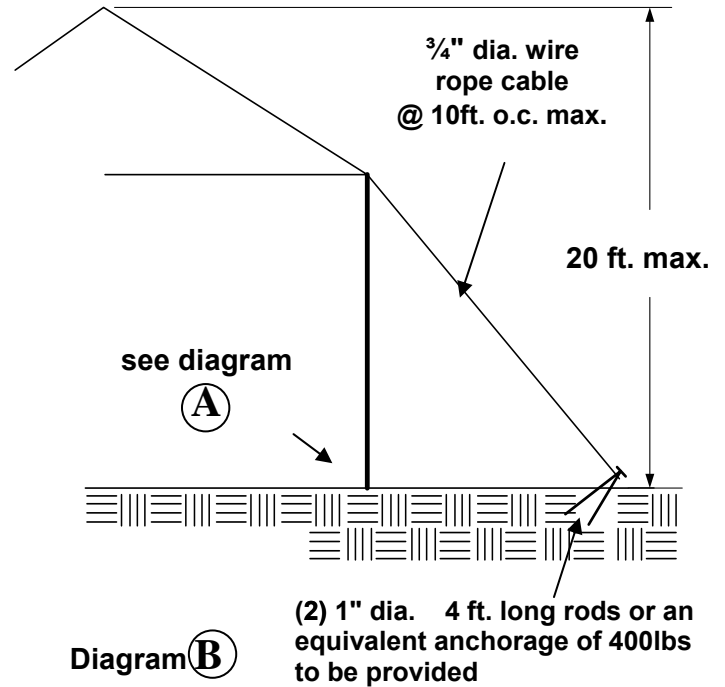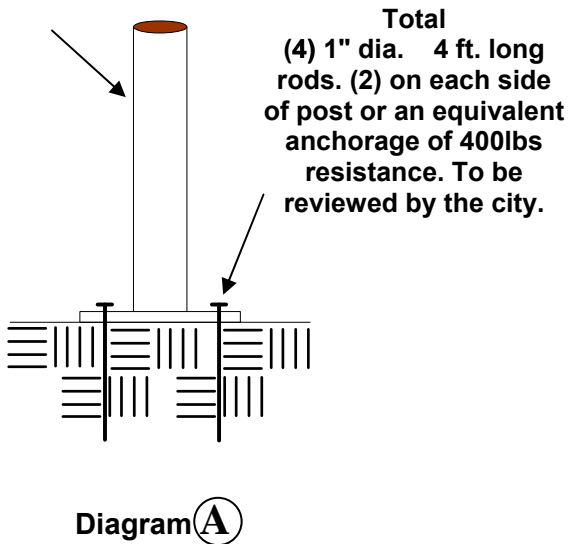

Special Notes:

For Bail Ring tents and other tent structures with dimensions greater than 40ft. x 60 ft. or heights greater than 20 ft.: Engineering design and details stamped and wet signed by an engineer is required. Usage of previous year calculations and design must be approved by the engineer who created the design.

